

Cable Kit 3214 Interface 3009/43

Mimer SoftRadio – Jotron TR-7550

Remote functionality

This cable kit will together with the Mimer Network Interface give remote control of the radios audio and PTT functions.

It will also present a virtual control head, to the operator, with remote selection of five pre-set channels.



Channel programming

Both the Rx and the Tx module needs to be set up with five pre-programmed channels. The frequency needs to be the same in both Rx and Tx modules. And all five slots shall be filled.

If you for example only have three channels, then repeat CH3 also in memory slot 4 and in memory slot 5.

Radio programming

See setup on next page.


Power Supply

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.



Cable Kit 3214

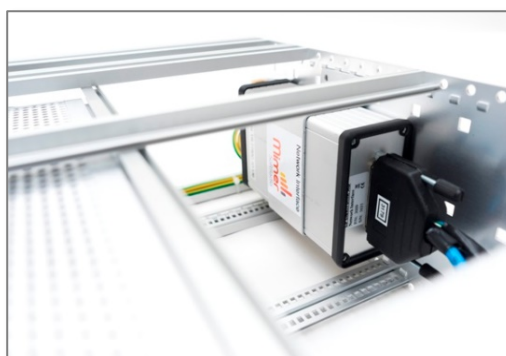

Interface mounting
With bracket 3106

Transmitter Settings

Go to the transmitters "Settings menu"

Set: REM A 02

SoftRadio is set up with the following parameters:

Line 34%
TXMO 43%
RXMO 42%
MOD 91%

In the "Configuration menu" check/set:

LINE TRM = OFF
LINE KEY = 12V
RS485/232 = RS485
BDR9600

Receiver Settings

Go to the receivers "Settings menu"

Set: REM A 01

SoftRadio is set up with the following parameters:

Line 62%

In the "Configuration menu" check/set:

RS485/232 = RS485
BDR9600