

Cable Kit 3295 Interface 3130 or 3009/09

Mimer SoftRadio for Vokkero “WI” 4-Wire Interface

Remote functionality

This cable kit will together with the Mimer Network Interface give remote control of the 4-wire interfaces audio and PTT functions.

Vokkero “WI” 4-Wire Interface & Handheld - Programming

No special programming needed.

Duplex / Simplex

With the Mimer Interface 3009/09 the connection to the SoftRadio operator will be full duplex. The operator can listen at the same time that he is transmitting.

With the Mimer Interface 3130 the connection will be simplex. The operator will not hear the conversation while he is transmitting.



Vokkero “WI” 4-Wire Interface with network interface 3009/09 and 3130


Connection

The 4-Wire Interface is connected through the two XLR connectors.

The red and black wires shall be connected to 12VDC, red is positive.

If it is preferred to use the same power source for both interfaces, the Mimer Network Interface can alternatively be powered from 24VDC just as the Vokkero Interface is.

The Mimer Network Interface consumes max 0,3A.

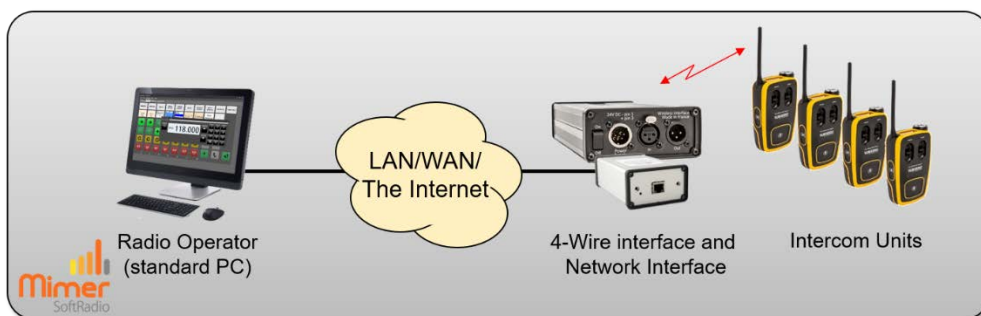

Basic setup with one operator and one Vokkero talk group