

## Cable Kit 3418 Interface 3130 or 3009/09

### Mimer SoftRadio for Jotron TR910



#### Remote functionality

This cable kit will together with the Mimer Network Interface LE give remote control of the radio's audio and PTT functions.



Channel change is not possible.

#### Radio programming

- Ports for Busy and PTT
- Audio levels


See next page for details.

#### Cable Kit

The radio is connected through the I/O connector on the back.

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.

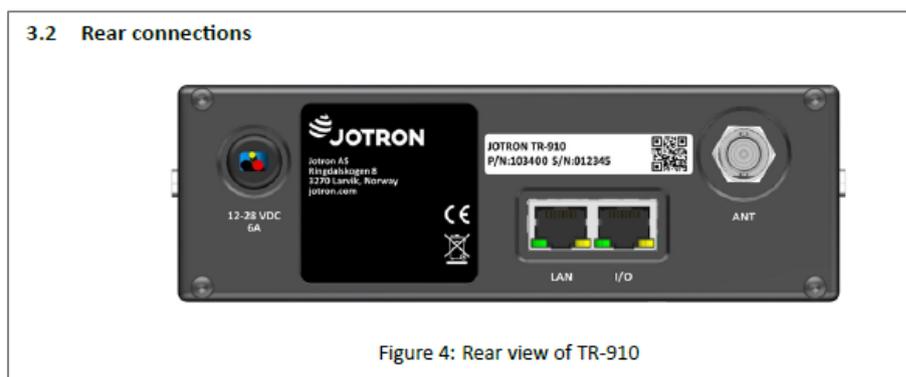

*Picture from Jotron manual*

## Radio Settings


Screen shots from TR910

### I/O Settings

Enter the radios service menu

Select Interface Config

Select I/O Config

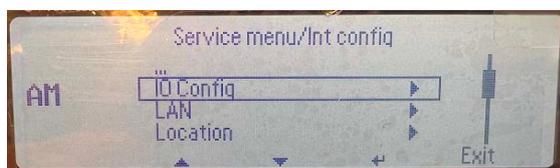


Select I/O#4

Select TX Key – This will give PTT input on I/O 4




Go back and select I/O#7

Select RX Busy – This will give an output on I/O 7 when busy

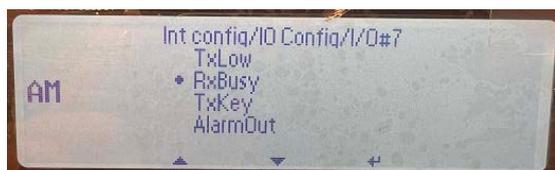


## Audio Settings

Enter the main menu configuration

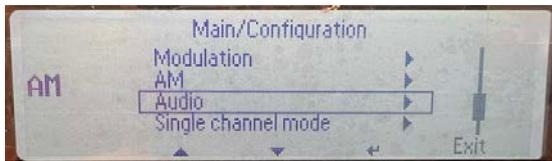


Select Audio

Select Input Source

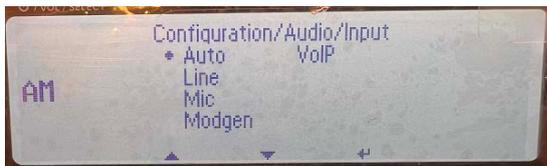


Select Auto

Go back and select Line Sensitivity

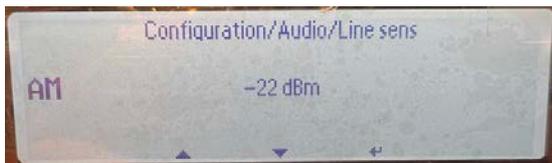


Set to -22dBm

Go back and select Monitor Output

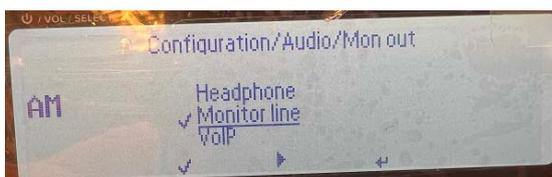

Select Monitor Line (only)

Go back and select Monitor Level

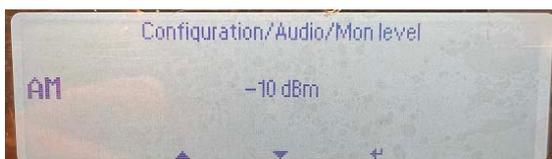

Set to -10dBm