

## X-Link Cable kit 3376

### Connect an Kirisun M50 to Mimer X-Link MK2

Also refer to the X-Link setup manual.

#### Interface Power Supply

12VDC / max 0,3A.

Power connection through separate cable delivered with the interface. Red is positive.

#### Radio programming

No special programming is needed in the unit.

#### Connection

The radio is connected through both the front microphone connector and the on-top speaker connector.

#### Volume setting

The volume of the M50 shall be set to “half” volume.




## Settings in the X-Link interface

Select the proper settings for Radio A or Radio B depending on your connection.

- Radio with AF level sense for Rx detect.
- Set the detect level etc.  
Details can be found in the setup manual.

The levels in the picture are our recommendations. You might find that your radio needs adjustments.

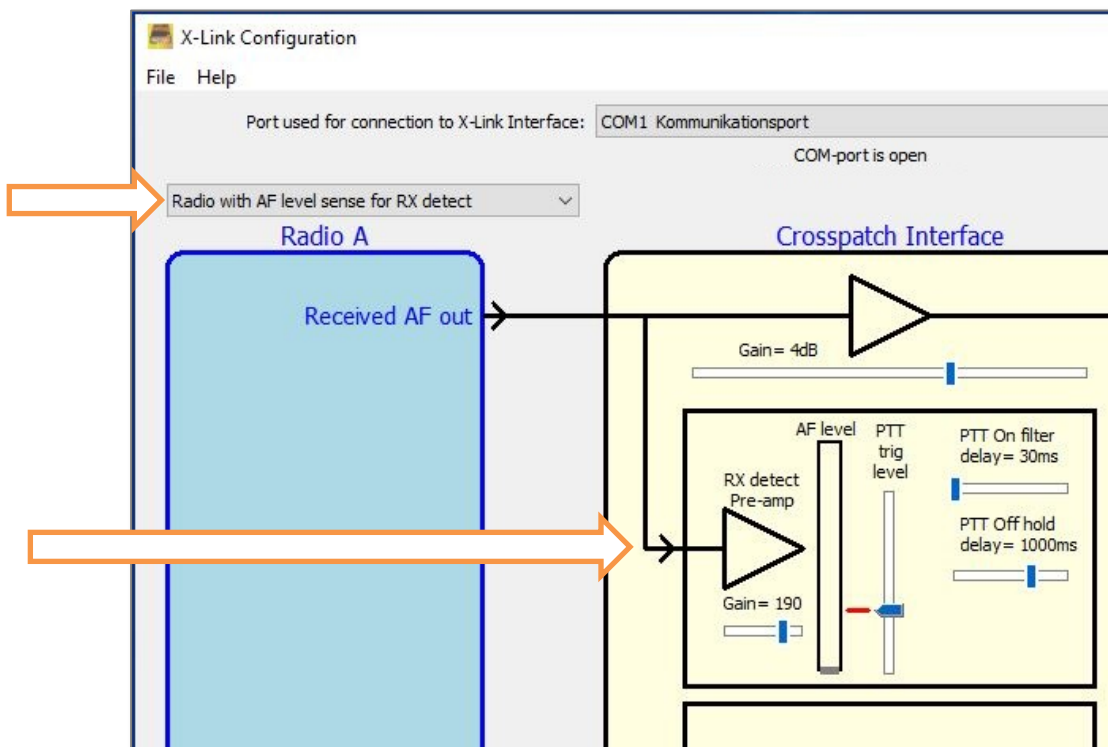

*Part of the Configuration software window*

Check/adjust the audio levels in both directions in the interface so that the users can hear the X-Link with the same level as when listening to other radios.

See the X-Link setup manual for details on setting the audio level.