

Cable Kit 3021 Interface 3130 or 3009/17

Mimer SoftRadio - Motorola GM-series and DM1000-series (20 pin) without virtual control head (not for use with Tetra radios)

Remote functionality

This cable kit will together with the Mimer Network Interface gives remote control of the radios audio and PTT functions.

Virtual Control Head is not possible.

Radio programming GM-series

GPIO Pin 3 shall be programmed for "Voice PTT, active low"
Enable accessory connector mic in miscellaneous-microphone
Select Rx Audio as "Filtered Squelched" in miscellaneous-global
Enable Ignition Sense in miscellaneous-global


Radio programming DM-series

GPIO 1 - Pin 3, shall be programmed for "Ext Mic PTT, active low"
Select Rx Audio as "Filtered Squelch" in Accessories
Set Ignition Sense to "On/Off or Ignition" in Accessories

Power

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.

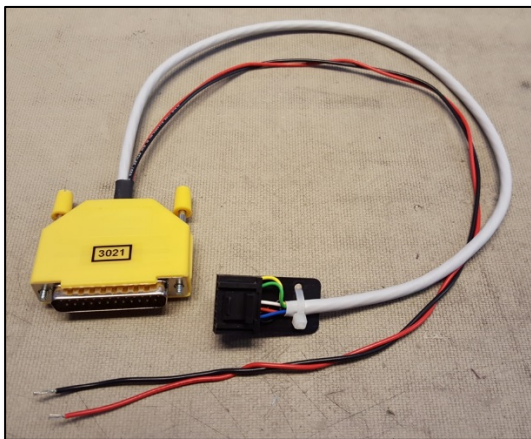

Cable Kit 3021