

## Cable Kit 3313 Interface 3130 or 3009/09

### Mimer SoftRadio for Jotron TR810



#### Remote functionality

This cable kit will together with the Mimer Network Interface LE give remote control of the radios audio and PTT functions.



Channel change is not possible.

#### Radio programming

- The correct microphone port
- The speaker output port and level


See next page for details.

#### Cable Kit

The cable kit connects to the two RJ45 connectors on the back of the radio.

The red and black wires shall be connected to 12VDC, red is positive.

The network interface consumes max 0,3A.

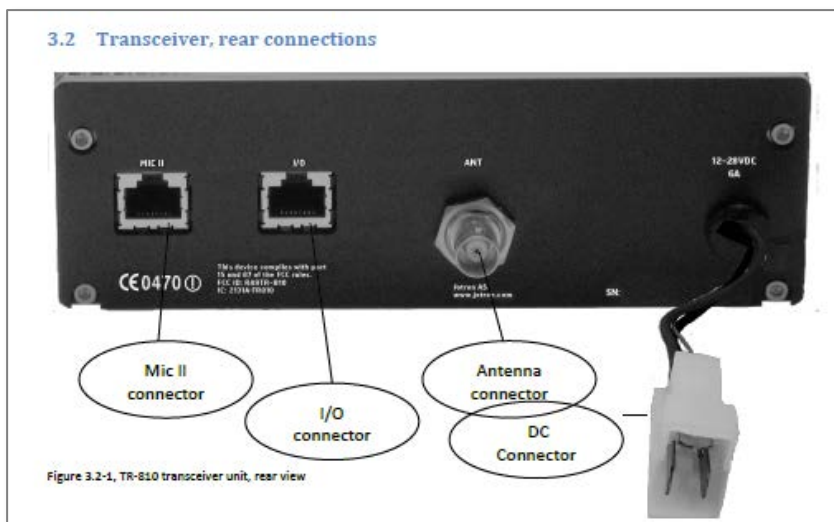

Picture from Jotron manual

## Programming

See pictures below for settings.

Default password for settings is 0000.


### Select Rear Microphone:

Menu path:	Parameter	Setting:
Radio Ctrl / Audio	Mic Rear	On



### External speaker settings:

Menu path:	Parameter	Setting:
Radio Ctrl / Audio / Ex. speaker	Track	Off
Radio Ctrl / Audio / Ex. speaker	Mute On Tx	On

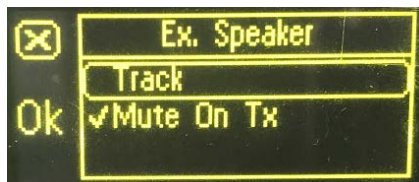

Menu path:	Parameter	Setting:
Radio Ctrl / RX settings	Ext. speaker	50%

